

SD ECO PLUS 75Wp



SDDirectPro

SD ECO PLUS 75Wp

Specifications	
Cell	polycrystalline solar cell 156mm x 93mm
No. of cells and connections	36(4 x 9)
Dimension of module (mm)	905 x 670 x 35
Weight	7.4kg

Characteristics	
Model	SD ECO PLUS 75Wp
Open circuit voltage (Voc)	22.2V
Optimum operating voltage (Vmp)	18.3V
Short circuit current (Isc)	5.21A
Optimum operating current (Imp)	4.10A
Maximum power at STC (Pm)	75Wp


STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5

Limits	
Operating temperature	-40°C to + 85°C
Maximum system voltage	1000V DC

Temperature and Coefficients		
NOCT	48°C ± 2°C	
Current temperature coefficient	%/K	0.033
Voltage temperature coefficient	MV/K	-0.36
Power temperature coefficient	%/K	-0.47

NOCT: Nominal Operation Cell Temperature

5 year warranty

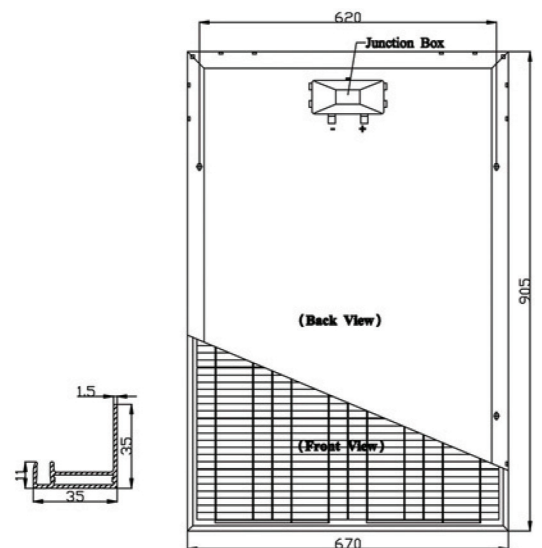

ITEM	MODULE SIZE	PALLET SIZE	Qty Per Pallet	Pallet per 40' Container	Qty 40' Container
SD ECO PLUS 75Wp	905*670*35	1390*1100*2150mm	120pcs	16 Pallets	2040pcs